


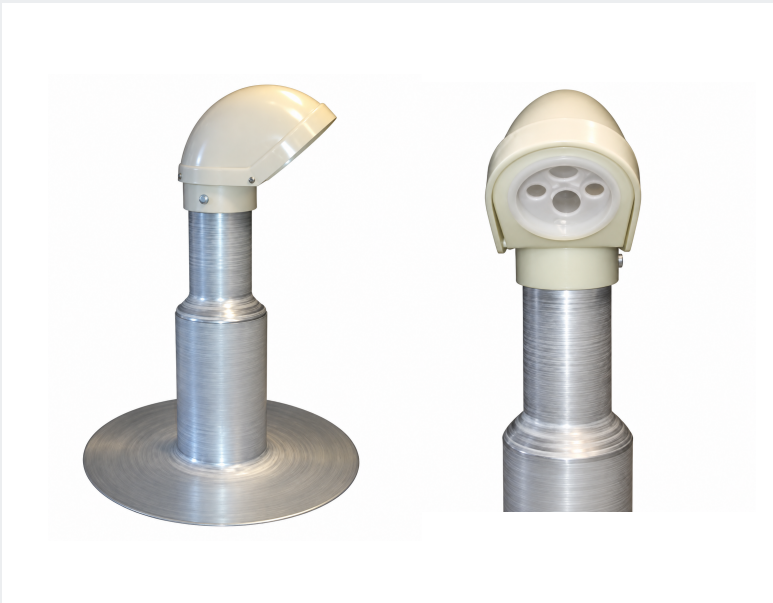

PRODUCT INFORMATION

Ensure a clean, watertight, and durable cable penetration with an insulated solution designed specifically for roofing applications.

Features

- 12' high spun aluminum base with removable 3 piece
- PVC head, 15" overall height
- PVC head allows for up to 4 shielded electrical cables
- with weather tight seal
- Factory insulated base with $\frac{3}{4}$ " thickness polyurethane foam
- 2" I.D. between walls of insulation
- 11.5" wide flange on base of flashing

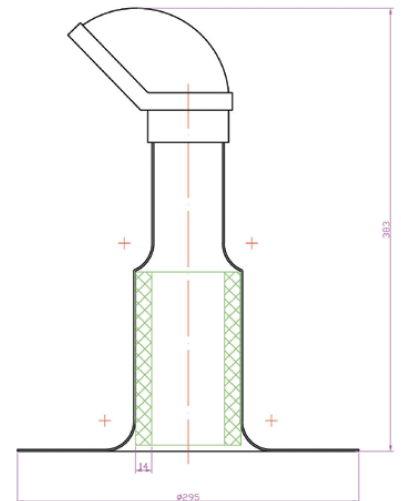


Fig. 1. Muti-Wire Insulated Cobra Head Electrical Flashing

