



PRODUCT INFORMATION

Features

- Tested and certified by QAI Labs for CSA B-272.
- Heat-mold injected polyurethane foam lined with 9.2 mm (.363 in.) insulation thickness.
- Uniform rigid insulation thickness on all interior walls.
- Stack made of seamless HD spun aluminum.
- .07 in. (1.8 mm) aluminum material thickness.
- 12.6 in. (320 mm) stack height without cap.
- Stack top opening I.D. 102 mm (4.01 in.) between foam walls.
- Available with either 3 in., 4 in. or Vandal Proof cap.
- Caps are spun aluminum and attached to vent stack (screwed).
- Vent stack flashing to be used on vent pipes such as soil stacks or sanitary pipes.
- Heavier grade quality aluminum than other brands.

Millenium Warranty

Millenium provides a limited ten (10) year warranty on materials against manufacturing defects and a one (1) year warranty on the paint finish, where applicable. This warranty does not cover damage resulting from misuse, product modification, or installation that does not comply with Millenium's installation recommendations.

Millenium Quality

Millenium copper roof drains are manufactured under rigorous quality control processes to deliver long-lasting performance, outstanding corrosion resistance, and reliable installation. Every product is engineered to meet the requirements of architects, engineers, and building professionals.

Technical Information Sheet


With 3 in. or 4 in. Aluminum or Vandal Proof Cap


Customer Testimonial

“These stacks are top quality, premium grade aluminum and the best value I have ever seen on the market.”

Advanced Roofing Inc.

Insulated Vent Stack

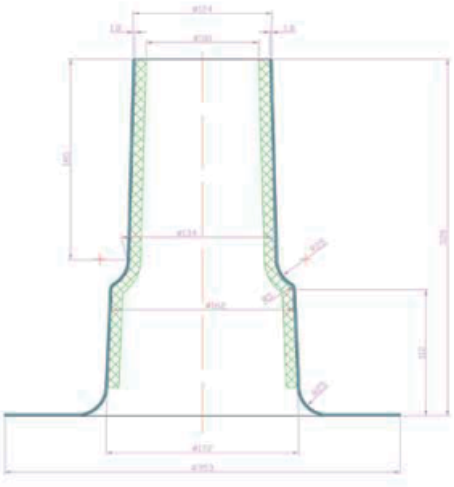

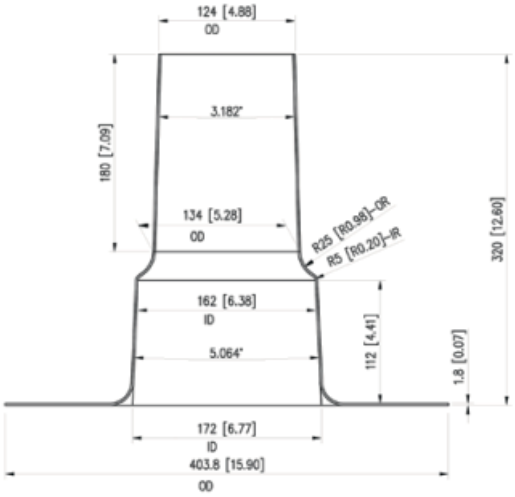

Head Office – Quebec
3200, 2e Rue
Saint-Hubert (QC) J3Y 8Y7

Ontario
27 Melanie Dr.
Brampton (ON) L6T 4K8

Maritimes
559, ch. Cocagne Sud
Cocagne (NB) E4R 2K2

REV:2026.10.20
1 833 454-3176
millenium.plus