

## FOUR NIPPLE ELECTRICAL FLASHING



### Features

- EPDM and TVP boot designed for 4 separate wiring locations, each with their own variable diameter cut-out
- EPDM and TVP provide excellent flex fatigue resistance and ozone resistance
- 4 MJ clamps supplied to secure and seal openings around wiring as needed
- 2 large diameter 2 1/2" openings and 2 smaller 1 1/2" openings
- EPDM boot top over a seamless spun aluminum base with double groove for secure fit
- Seamless spun aluminum base is 6" high and 14" in diameter
- Total height with EPDM boot is 9" in height
- Ideal for multiple wiring applications on low slope roof
- Spun alum base EF4NW with 4" flange

Fig. 1. EPDM Boot

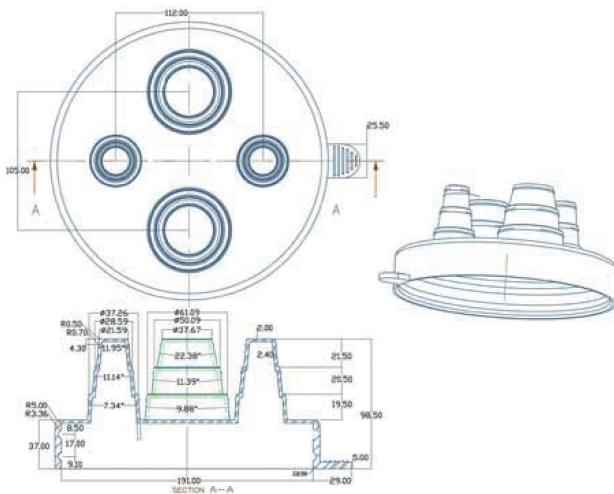


Fig. 2. Seamless Spun Aluminum Base

